



SOAP

Series 0046 · Soft Forms collection

A1 · EN 13501-1

SOFT FORMS



SOAP — 3D gypsum wall panel, supplied white and painted on site.

KEY FACTS — PER PANEL


PANEL SIZE 500 × 500 MM	THICKNESS 28 MM	WEIGHT PER PANEL 4.5 KG
COVERAGE PER PANEL 0.25 M²	PANELS PER M² 4 PCS	SUPPLIED AS PACK OF 3 PANELS

MATERIAL & COMPOSITION
● Reinforced gypsum fibre board — EN 15283-2:2008+A1:2009
● Mineral composition · no harmful additives
● Mean density 1130 kg/m³ (EN 15283-2)
● Supplied white, unfinished — painted on site in any colour
● For dry interior walls and ceilings


REACTION TO FIRE
A1
Classified A1 (EN 13501-1) — the highest fire rating under European fire safety standards. Non-combustible.
Classification report No. 1871-CPR-RtF-921 · CTEC Ltd, Notified Body 1871 · AVCP System 3 · Tested to EN ISO 1182 / EN ISO 1716

Nominal manufacturer specifications from kandes.eu product data and Kandes CE documentation. Subject to technical changes — the current edition applies.

IN DETAIL

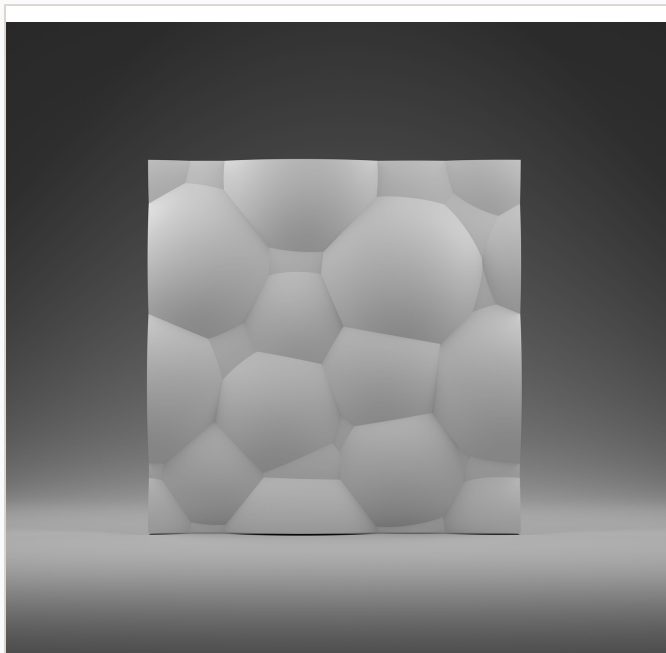

SOAP · PRODUCT TILE

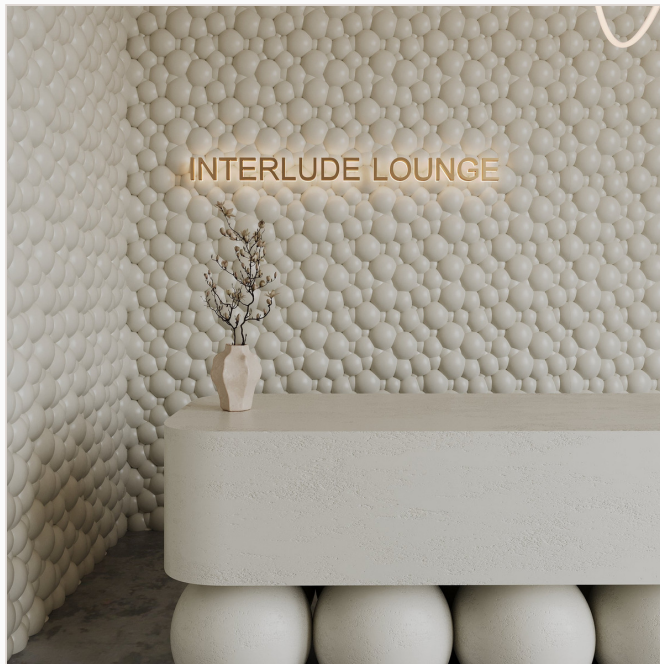

SOAP · INTERIOR

SOFT FORMS — DESIGNED FOR CONTINUITY

SOAP belongs to the Soft Forms collection: flowing, organic relief designed to run continuously across the wall. Once the joints are filled and the surface is painted, the individual panels merge into one unbroken sculptural surface.

INSTALLATION SUMMARY

- 1 Acclimatise.** Keep panels in their original packaging, stored vertically as delivered, for 24 hours in the room before installation. Unpack immediately before installing.
- 2 Bond.** Fix to a firm, level, clean substrate with gypsum-based adhesive; mechanical fixing where required.
- 3 Fill joints.** Use a fine, soft filler paste — not the adhesive gypsum putty.
- 4 Finish.** Sand and prime the filled joints.
- 5 Paint.** On site, in any colour.

Any skilled tiler or plasterer can handle the installation.

STORAGE & HANDLING

- Store vertically in the original packaging, as delivered on the pallet — never flat
- Dry interior storage, 15–25 °C, 40–60 % RH
- Protect from moisture and direct water contact

DELIVERY

IN STOCK
HANDLING 1–3 BUSINESS DAYS
EU DELIVERY 5–10 BUSINESS DAYS

Custom requests may require additional lead time.

RELATED DOCUMENTATION

[Declaration of Performance \(DoP\)](#)[Technical Data Sheet — product family](#)[Compliance Summary Report](#)[Installation guide & videos](#)

Request the complete document pack via “Get the spec sheets” on the product page, or write to info@kandes.ch. The EN 13501-1 fire classification report (No. 1871-CPR-RtF-921) is available on request.